




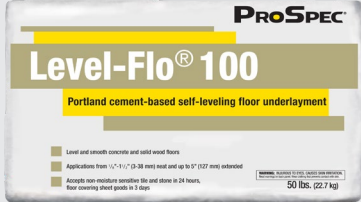




ADVANTAGES/USES	FEATHER EDGE PRO	FEATHER PATCH PRO	LEVEL-FLO PRIMER	LEVEL-FLO PRIMER PRO
	 <ul style="list-style-type: none"> • Ideal for use as an embossing leveler. • Non-sanded, ultra-smooth finish • Can apply to concrete with RH up to 90% • High bond strength • Does not require priming • Compatible with sealed gypsum based flooring • Interior use only 	 <ul style="list-style-type: none"> • Ideal for deeper patching jobs • Can apply to concrete with RH up to 90% • High bond strength • Initial set in 15 minutes • Does not require priming • Compatible with sealed gypsum based flooring • Interior use only 	 <ul style="list-style-type: none"> • For use over porous surfaces as a substrate primer before use of Level-Flo underlayments • Enhances self-leveling flow and adhesion • Water based, liquid polymer-latex • Interior use only 	 <ul style="list-style-type: none"> • For use over porous and non porous surfaces as a substrate primer to promote bonding before use of Level-Flo underlayments • Enhances self-leveling flow and bond to difficult substrates
APPLICATION				
Thickness	Featheredge to ½" per layer	Featheredge to 2" per layer	N.A.	N.A.
Working Time @ 70°F	15-20 minutes	12-15 minutes	N.A.	N.A.
Pot Life @ 70°F	15-20 minutes	12-15 minutes	N.A.	N.A.
Initial Set Time @ 70°F	20 minutes	15 minutes	1-3 hours	30 minutes
Final Set Time @ 70°F	Can accept floor coverings in ≥ 30 minutes	Can accept floor coverings in ≥ 30 minutes	2-4 hours	1-3 hours
Industry Standards	Compressive strength ≥ 4,500 psi (28 days)	Compressive strength ≥ 4,000 psi (28 days)	N.A.	N.A.
Enhancements	Polymer-modified, Self-drying	Polymer-modified, Self-drying	Concentrated, dilute at job site	Solvent free, low VOC
Suitable Substrates (Refer to Data Sheet for restrictions and notes)	Concrete, ceramic tile, exterior grade plywood or OSB underlayment equal, cutback and carpet adhesive residues, resilient flooring, CBU	Concrete, ceramic tile, exterior grade plywood or OSB underlayment equal, cutback and carpet adhesive residues, resilient flooring, CBU	Concrete, fully cured mortar beds, exterior grade plywood or OSB underlayment equal, CBU	Concrete, ceramic tile, exterior grade plywood or OSB underlayment equal, cutback and carpet adhesive residues, resilient flooring, CBU, epoxy coatings cold rolled steel
For Technical Product Data, Industry Standards, and Material Safety Data Sheets on all of the ProSpec® products, please visit our website at www.tccmaterials.com				

	LEVEL-FLO 50	LEVEL-FLO 100	LEVEL-FLO 200	LEVEL-FLO 300
ADVANTAGES/USES				
	<ul style="list-style-type: none"> • Provides a smooth, flat underlayment surface • Not a wear surface • Encapsulate radiant heat systems • Portland cement-based • Interior use only 	<ul style="list-style-type: none"> • Provides a smooth, flat underlayment surface • Not a wear surface • Encapsulate radiant heat systems • Portland cement-based • Interior use only 	<ul style="list-style-type: none"> • For fast self-leveling, provides a flat, smooth surface • Not a wear surface • Encapsulate radiant heat systems • Non-gypsum • Interior use only 	<ul style="list-style-type: none"> • For fast, high-strength self-leveling, provides a flat, smooth surface • Not a wear surface • Can be featheredged to adjoining elevations • Encapsulate radiant heat • Non-gypsum • Interior use only
APPLICATION				
Thickness	Min 1/8" Max 1" per layer	Min 1/8" neat Max 1 1/2" neat Max 5" extended per layer	Min 1/8" neat Max 2" neat Max 5" extended per layer	Min 1/8" neat Max 2" neat Max 5" extended per layer
Working Time @ 70°F	≥ 20 minutes	≥ 20 minutes	≥ 20 minutes	≥ 20 minutes
Pot Life @ 70°F	≥ 15 minutes	≥ 15 minutes	≥ 15 minutes	≥ 15 minutes
Initial Set Time @ 70°F	80-120 minutes	80-120 minutes	80-120 minutes	80-120 minutes
Final Set Time @ 70°F	Foot traffic 2-4 hr. Set tile in 24 hr. Resilient flooring in 3 days	Foot traffic 2-4 hr. Set tile in 24 hr. Resilient flooring in 3 days	Foot traffic 3-4 hr. Set tile in 4 hr. Resilient flooring in 16-24 hours	Foot traffic 2-4 hr. Set tile in 2 hr. Resilient flooring in 4 days
Industry Standards	Compressive strength ≥ 4,000 psi (28 days)	Compressive strength ≥ 4,000 psi (28 days)	Compressive strength ≥ 5,000 psi (28 days)	Compressive strength ≥ 6,000 psi (28 days)
Enhancements	Liquid cement board	Height can be extended to 5" with 15 lb. 3/8" pea gravel per 50 lb. bag	Height can be extended to 5" with 15 lb. 3/8" pea gravel per 50 lb. bag	Height can be extended to 5" with 15 lb. 3/8" pea gravel per 50 lb. bag
Suitable Substrates (Refer to Data Sheet for restrictions and notes)	On, above, or below grade interior surfaces once properly prepared and primed, follow TCNA installation methods	On, above, or below grade interior surfaces once properly prepared and primed, follow TCNA installation methods	On, above, or below grade interior surfaces once properly prepared and primed, follow TCNA installation methods	On, above, or below grade interior surfaces once properly prepared and primed, follow TCNA installation methods
For Technical Product Data, Industry Standards, and Material Safety Data Sheets on all of the ProSpec® products, please visit our website at www.tccmaterials.com				