



LOAD N GO[®] SILO SYSTEM

U.S.A.

1-888-SPECMIX

KEEP GOING. KEEP MOVING. KEEP WORKING.



Just Load and Go!

For mortar, colored mortar, grout, stucco, shotcrete, utility products or custom mixes, the SPEC MIX[®] LOAD N GO Silo Systems is the ideal tool for increasing on-site mortar delivery versatility. Specifically designed as a low-profile, lightweight addition to the SPEC MIX silo fleet, the LOAD N GO is ideal for interior work, large residential, small commercial or a multitude of jobsite conditions. Its two-component design allows for the contractor to use smaller forklifts with lower lifting height capacities. With the addition of the LOAD N GO ladder kit, the silo operates the same as the standard G7000 with a one-bulk bag capacity.


**MINIMIZING LABOR. INCREASING
PRODUCTIVITY. IMPROVING JOBSITE
EFFICIENCY. CUTTING WASTE.
OPTIMIZING WORK SPACE. DECREASING
JOBSITE FORKLIFT REQUIREMENTS.
GETTING THE MIXING STATION NEXT TO
THE WORK. WORKING SMARTER, NOT
HARDER—THAT'S THE OBJECTIVE!**





HIGH SETTING

LOW SETTING

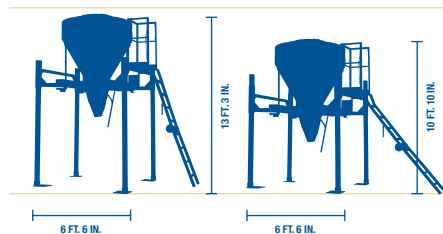

SPECIFICATIONS

2 COMPONENT SYSTEM
 DURABLE POLYETHYLENE CONE
 1 BULK BAG CAPACITY (63 CU. FT.)

FOOTPRINT	6 FT. 6 IN. X 7 FT. 1 IN.
TOP COMPONENT	400 LBS.
BOTTOM COMPONENT	740 LBS.
WEIGHT EMPTY	1150 LBS.
WEIGHT FULL	5200 LBS.
SHIPPING HEIGHT	8 FT. 3 IN. COLLAPSED
JOB SITE HEIGHTS	LOW SETTING: 10 FT. 10 IN. HIGH SETTING: 13 FT. 3 IN.
FORKLIFT REQUIREMENTS	4000 LBS. LIFT CAPACITY 10 FT. IN THE AIR

FOR MORE INFORMATION

CONTACT SPEC MIX, INC. 1-888-773-2649

FOR MORE SPECIFIC INFORMATION,
 VISIT US ONLINE AT WWW.SPECMIX.COM

OPERATING AND SAFETY INSTRUCTIONS



1

KEEPING THE MIXING STATION AS CLOSE AS POSSIBLE TO PRODUCTION HAS NEVER BEEN AS ACHIEVABLE REGARDLESS OF THE PROJECT TYPE. THE LOAD N GO CAN BE POSITIONED INSIDE BUILDINGS OR EASILY MOVED MULTIPLE TIMES ON ANY SITE WITH LOW HEIGHT AND WEIGHT CAPACITY FORKLIFTS. ONCE POSITIONED NEXT TO THE WORK, A DOUBLE BATCH OF MATERIAL IS MADE IN 5 MINUTES OR LESS WITHOUT STRAINING THE LABORERS OR COMPROMISING THE INTEGRITY OF THE MIX. THIS IS HOW IT WORKS:



2

STEP 1: Designed as two-component silo system, the LOAD N GO® is easily erected with standard jobsite forklift. First, insert the lift's forks into the designated pockets allowing the operator to raise the top cone of the LOAD N GO to the desired height. Next, pin all the legs to secure the LOAD N GO for use.



3

STEP 2: To load the LOAD N GO with your SPEC MIX® products, remove the safety "locking pin" enabling the cone to be lifted and placed on the ground. The forklift requirement for this task is seven (7) feet.

STEP 3: While the cone is on the ground, open the lid before the bulk bag is safely lifted into position. Then pull the safety B-locks on both the inner and outer chutes. It will take approximately 45-60 seconds for the bulk bag to dispense. The forklift will need to lift 3000 lbs. to a maximum of 10 feet.



4

STEP 4: Once the silo cone is full and the lid is securely closed, raise and place the cone into position on top of the silo's frame support. Now the operator must re-connect the material flow handle to the LOAD N GO's slide gate before making product. The lock pins of the cone must also be secured to ensure safety.



5

STEP 5: The LOAD N GO is easily relocated on site to position your mixing station as close as possible to the work to maximize your efficiency. CAUTION: Prior to lifting or moving the LOAD N GO, see that each lock pin is in position and secured by the safety clip. Now it is safe to insert the forklift forks into the pockets for relocating the LOAD N GO.