



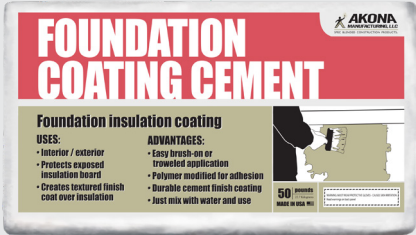





# CONCRETE SURFACE COATINGS SELECTION GUIDE

	FLOOR APPLICATIONS			
	POLYMER-MODIFIED CONCRETE RESURFACER	SELF-LEVELING FLOOR UNDERLAYMENT CEMENT	AKONAKOTE® POURABLE CONCRETE PATCH	SELF-LEVELING RESURFACER
				
<b>USES &amp; ADVANTAGES</b>	<ul style="list-style-type: none"> <li>• Renews concrete surfaces</li> <li>• For use on steps, patios, garage floors, and more</li> <li>• Ideal for resurfacing spalled concrete</li> <li>• Polymer-modified</li> <li>• Trowel or broom finish</li> <li>• Designed for even application 1/4" thick down to 1/8"</li> </ul>	<ul style="list-style-type: none"> <li>• Prepares plywood or concrete surfaces prior to installation of flooring</li> <li>• Self-leveling and flowable mixture</li> <li>• Premixed with integral primer no additional primer required</li> <li>• Provides flat and level floors</li> <li>• Great to encapsulate radiant heat installations</li> </ul>	<ul style="list-style-type: none"> <li>• Polymer-modified for superior adhesion</li> <li>• Flowable and pourable</li> <li>• Trowel or stiff-edge blade applied</li> <li>• Corrects defects in concrete surfaces up to 1/2" prior to applying new floor coverings</li> <li>• Wearable surface up to light-duty commercial</li> </ul>	<ul style="list-style-type: none"> <li>• Final set in 40-60 minutes</li> <li>• Provides a smooth, hard, flat surface</li> <li>• Accepts foot traffic in 2-3 hours</li> </ul>
<b>COVERAGE</b>	• 25 lb. yields 25 sq. ft. at 1/8" thickness	• 50 lb. yields 50 sq. ft. at 1/8" thickness	• 50 lb. yields 50 sq. ft. at 1/8" thickness	• 50 lb. yields 44 sq. ft. at 1/8" thickness
APPLICATION	WEARABLE SURFACE	UNDERLAYMENT	WEARABLE SURFACE	WEARABLE SURFACE
Interior & Exterior	X	Interior Only	X	X
Preblended Mixing Liquid:	Water Only	Water Only	Water Only	Water Only
Polymer-Modified	X	X	X	
Corrects Defects in Concrete Surfaces	X	X	X	X
Creates Textured Finish				
Creates Flat Surface		X	X	X
Creates Moisture Resistant Finish				
High Strength	X		X	X
Coating Insulated Concrete Forms				
For Technical Product Data, Industry Standards, and Material Safety Data Sheets on all of the Akona® products, please visit our website at <a href="http://www.menards.com">www.menards.com</a>				

# CONCRETE SURFACE COATINGS SELECTION GUIDE

	WALL APPLICATIONS			
	FOUNDATION COATING CEMENT	CRACK-RESISTANT SURFACE BONDING CEMENT	HEAVY-DUTY WATERPROOFING BASE COAT	FLEXCRETE
				
<b>USES &amp; ADVANTAGES</b>	<ul style="list-style-type: none"> <li>Protects exposed insulation board (ICF) from damage of UV radiation, weathering, or general wear</li> <li>Polymer-modified and fiber reinforced for superior performance</li> <li>Easy brush-on or troweled application</li> <li>Creates textured finish coat of insulation</li> </ul>	<ul style="list-style-type: none"> <li>Bonds dry stacked masonry walls</li> <li>Glass fiber reinforced for strength &amp; durability</li> <li>Controls shrinkage, cracking, and sagging on vertical repairs</li> <li>Repairs deteriorated concrete walls</li> <li>Patches deep vertical holes in concrete and masonry walls</li> </ul>	<ul style="list-style-type: none"> <li>Waterproof finish coat when mixed with bonding additive and applied in 2-coats</li> <li>Applies to smooth or textured finishes</li> <li>Used as a decorative coating</li> <li>May be painted or faux finished</li> <li>Used above or below grade</li> <li>Works on non-uniform surfaces</li> </ul>	<ul style="list-style-type: none"> <li>Provides a waterproof barrier that is flexible enough to resist/bridge cracking in the main structure</li> <li>Bonds to concrete, masonry, metal, PVC and ABS plumbing fixtures</li> <li>Protects against corrosion</li> <li>Polymer-modified for increased adhesion and flexibility</li> <li>Ready for flood testing in 2 hours at 70°F or higher, can accept traffic in 12 hours</li> </ul>
<b>COVERAGE</b>	• 50 lb. yields 50 sq. ft. at 1/8" thickness	• 50 lb. yields 50 sq. ft. at 1/8" thickness	• 50 lb. yields 50 sq. ft. at 1/8" thickness	• 20 lb. yields 20 sq. ft. at 1/8" thickness
APPLICATION	WEARABLE SURFACE	WEARABLE SURFACE	WEARABLE SURFACE	WEARABLE SURFACE
Interior & Exterior	X	X	X	X
Preblended Mixing Liquid:	Water Only	Water or Bonding Additive	Bonding Additive	Water Only
Polymer-Modified	X			X
Corrects Defects in Concrete Surfaces		X		
Creates Textured Finish	X		X	
Creates Flat Surface				
Creates Moisture Resistant Finish			X	X
High Strength		X		X
Coating Insulated Concrete Forms	X			
For Technical Product Data, Industry Standards, and Material Safety Data Sheets on all of the Akona® products, please visit our website at <a href="http://www.menards.com">www.menards.com</a>				