




TENON®

Wax Cure 1315 WB

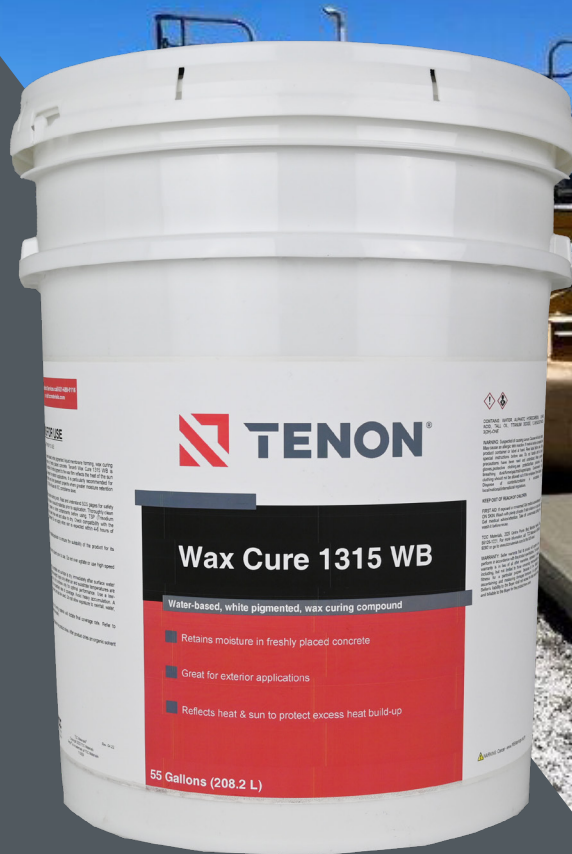

Ready To Use

Tenon® Wax Cure 1315 WB is a water-based, white pigmented, liquid membrane forming, wax curing compound used for moisture retention of freshly placed concrete. Tenon Wax Cure 1315 WB is formulated for curing concrete. The addition of white pigment to the wax film reflects the heat of the sun to protect excess heat build-up. Designed for exterior applications, it is particularly recommended for roadways, airport runways, parking lots, and other pavement projects where greater moisture retention is required. Tenon® Wax Cure 1315 WB will pass all VOC compliance laws.

Features:

- VOC Compliant
- Tack-free in 2-4 hours (cooler or more humid conditions will extend drying time)
- White pigments to reflect the heat of the sun
- Clean-up with water (after dry, a tool cleaning solvent may be required)



Application

New Concrete: Curing

Apply after troweling is complete and surface is dry, immediately after surface water has dissipated and concrete can withstand weight.

- Apply only when air and substrate temperatures are between 50°F-90°F (10°C-32°C). Apply to dry surfaces only for optimal performance.
- Use a low-pressure sprayer to apply uniformly at the specified rate of coverage. Avoid heavy accumulation. A lamb's wool applicator or medium nap roller can also be used.
- Do not allow exposure to rainfall, water, or traffic until fully dried.

Technical Data

Composition & Materials	Formulated with a refined petroleum wax to form a watertight membrane and finely ground white pigments to protect the substrate from heat build-up. Tenon products are manufactured only with the finest quality raw materials available and close quality-control is practiced.
Moisture	Meets ASTM C-1315 Type 2 Class A @ 300 sq/ft/gal
Efficiency	Meets ASTM C-309 Type 2 Class A @ 300 sq/ft/ gal Meets CRD-C300 @ 200 sq/ft/gal
Typical Drying Time @70°F	1-2 hours (touch) 4-12 hours (traffic)
VOC Content	70 g/L
A.I.M. Category	Concrete Curing Compound maximum VOC 350 g/L

Available In:

Tenon[®] Wax Cure 1315 WB is available in a 5 gal. pail, and 55 gal. drum, and 275 gal. tote.



275 Gal.

BOM #113828



55 Gal.

BOM #113829



5 Gal.

BOM #113830

For professional use only.

It is the responsibility of the installer/applicator to ensure the suitability of the product for its intended use. For technical assistance, please contact TCC Materials. To acquire technical and safety literature, please visit our website.