
VERSA-LOK®

DECA® SMOOTH

Retaining Wall System

The original solid, top-pinning block - now featuring a modern smooth face and a compact 10″ depth - maintains the same versatility and ease of installation for both standard retaining wall and freestanding wall applications.



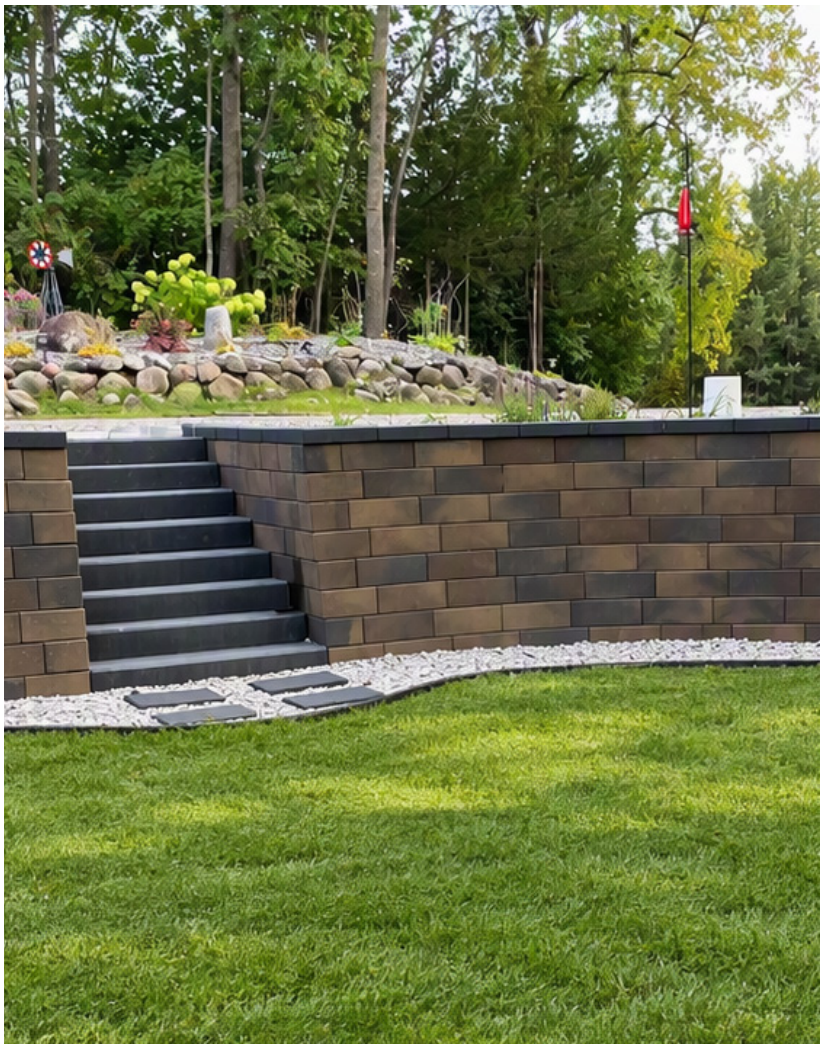



Applications

Residential & Commercial

Curves, corners, columns, stairs, freestanding walls, and retaining walls



Individual Unit

6″ H x 16″ W x 10″ D

67 lbs

Features & Benefits

- Solid unit allows easy field modification
- Outstanding durability in every application
- Hole-to-slot pinning system permits easy variable-bond and set-back construction
- No cores to fill, nor mortar or concrete footings required
- Ability to incorporate curves, corners, columns, stairs, and freestanding walls into any project
- Modern, smooth face with clean, chamfered edge

Installation Products

Contact your local sales rep to learn how VERSA-LOK accessories can help with your next project.




Lifters Pins Grid Adhesive

Freestanding Walls

Parapets or Seat Walls


Freestanding walls up to 2.0 to 3.0 feet high, for freestanding parapets above retaining walls, or stand-alone freestanding walls at grade

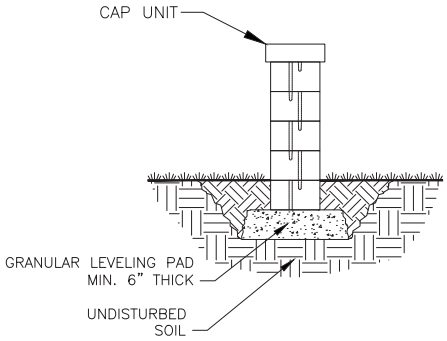

Retaining Walls

Unreinforced or Reinforced

Unreinforced walls can be built up to 3 feet high, while taller walls can be built with geogrid reinforcement

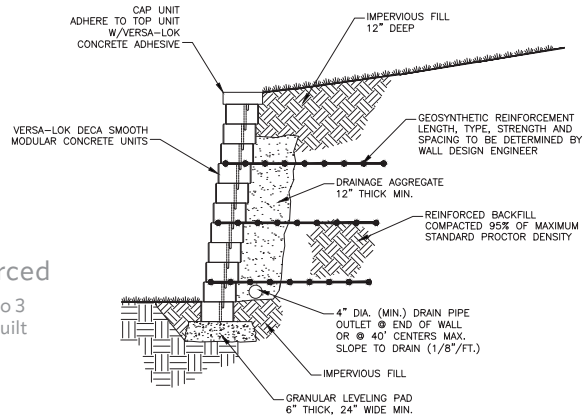

Pinning Detail

Each unit uses 2 VERSA-TUFF® pins

